

# PRODUCT SUBMITTAL / SUBSTITUTION REQUEST

TO:

PROJECT:

SPECIFIED ITEM:

Section

Page

Paragraph

Description

## PRODUCT SUBMITTAL / SUBSTITUTION REQUESTED:

The attached submittal package includes the product description, specifications, drawings, and performance data for use in the evaluation of the request.

## SUBMITTED BY:

Name:

Signature:

Company:

Address:

Date:

Telephone:

Fax:

## FOR USE BY THE ARCHITECT AND/OR ENGINEER

**Approved**       **Approved as Noted**       **Not Approved**

(If not approved, please briefly explain why the product was not accepted.)

By:

Date:

Remarks:

# Hollow-Set Dropin Internally Threaded Expansion Anchor

## PRODUCT DESCRIPTION

The Hollow-Set Dropin anchor is designed for anchoring in hollow base materials such as hollow concrete block and precast hollow core plank. It can also be used in solid base materials. Precast plank or concrete masonry blocks often have a maximum outer wall thickness of 1-1/2". During the drilling process, spalling on the back side of the wall often decreases the wall thickness, leaving only 1" or less for anchoring. The Hollow-Set Dropin is designed to perform in this environment, where most conventional style anchors will not function properly.

## GENERAL APPLICATIONS AND USES

- Anchoring to Concrete Block
- Suspending Conduit
- Cable Trays and Strut
- Pipe Supports
- Fastening to Precast Hollow Core Plank
- Fire Sprinkler
- Suspended Lighting
- Removable Anchorage

## FEATURES AND BENEFITS

- + Internally threaded anchor for easy bolt removability and service work
- + Unique expansion design allows for anchoring in thin-walled base materials such as hollow concrete block and precast hollow core plank
- + Versatile setting options allows for hollow or solid base materials
- + Tested in accordance with ASTM E488 and AC01 criteria

## APPROVALS AND LISTINGS

FM Global (Factory Mutual) - File No. 15219/1952, 3/8", 1/2" and 5/8" diameters.  
Pipe hanger components for automatic sprinkler systems  
Underwriters Laboratories (UL) File EX 1289 (Hanger, Pipe), 3/8", 1/2" and 5/8".

## GUIDE SPECIFICATIONS

**CSI Divisions:** 03151-Concrete Anchoring, 04081-Masonry Anchorage and 05090-Metal Fastenings. Dropin anchors shall be Hollow-Set Dropin as supplied by Powers Fasteners, Inc., Brewster, NY.

SECTION CONTENTS	Page No.
General Information .....	1
Installation Specifications .....	2
Material Specifications .....	2
Performance Data .....	3
Design Criteria .....	5
Ordering Information .....	7



Hollow-Set Dropin

## ANCHOR MATERIALS

Zamac Alloy Anchor Body with  
Carbon Steel Cone or  
Type 304 Stainless Steel Cone

## ROD/ANCHOR SIZE RANGE (TYP.)

1/4" to 5/8" diameter

## SUITABLE BASE MATERIALS


Normal-Weight Concrete  
Precast Hollow Core Plank  
Hollow Concrete Masonry (CMU)  
Brick Masonry

**INSTALLATION SPECIFICATIONS**


Dimension	Rod/Anchor Diameter, <i>d</i>				
	1/4"	5/16"	3/8"	1/2"	5/8"
ANSI Drill Bit Size, <i>d<sub>bit</sub></i> (in.)	3/8	5/8	5/8	3/4	1
Maximum Tightening Torque, <i>T<sub>max</sub></i> (ft.-lbs)	3-4	5-7	8-10	15-20	30-40
Thread Size (UNC)	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11
Overall Anchor Length (in.)	7/8	1-5/16	1-5/16	1-3/4	2
Sleeve Length (in.)	5/8	15/16	15/16	1-1/4	1-1/2
Thread Length In Cone (in.)	3/8	5/8	5/8	3/4	1

**Installation Guidelines for Hollow Base Materials**

In hollow base materials, drill through into the cell or void. The tolerances of the drill bit used must meet the requirements of ANSI Standard B212.15.



Blow the hole clean of dust and other materials. Do not expand the anchor prior to installation. Insert cone end and tap flush to surface.




Position fixture, insert bolt and tighten. The bolt should engage a minimum of 2/3 of the anchor threads. The anchor can also be expanded using a Hollow-Set Tool. (If Hollow-Set Tool is used, thread anchor onto tool prior to tapping into anchor hole. When flush with surface, turn tool clockwise to tighten. Release tool from set anchor by turning counterclockwise. Fixture can then be attached).




**Installation Guidelines for Solid Base Materials**


Drill a hole into the base material to the required embedment depth. The tolerances of the drill bit used must meet the requirements of ANSI Standard B212.15.



Blow the hole clean of dust and other materials. Insert the anchor into the hole. Position the setting tool in the anchor.

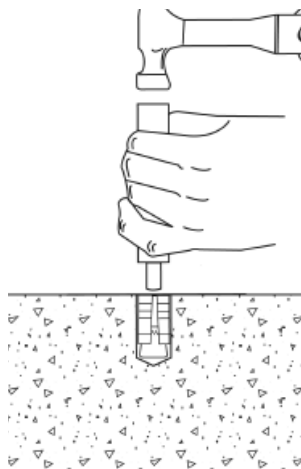

Using the Solid Tool, set the anchor by driving the Zamac sleeve over the cone using several sharp hammer blows. Be sure the anchor is at the required embedment depth, so that anchor threads do not protrude above the surface of the base material. Position the fixture, insert bolt or threaded rod and tighten.



**MATERIAL SPECIFICATIONS**

Anchor Component	Carbon Steel	Stainless Steel
Anchor Body	Zamac Alloy	Zamac Alloy
Cone	AISI C 1008	Type 304 Stainless Steel
Plating (Cone)	ASTM B633, SC1, Type III (Fe/Zn 5)	N/A

### PERFORMANCE DATA

#### Ultimate Load Capacities for Hollow-Set Dropin in Normal-Weight Concrete<sup>1,2,3</sup>

Rod/ Anchor Diameter <i>d</i> in. (mm)	Min. Embed. Depth <i>h<sub>v</sub></i> in. (mm)	Drill Bit Diameter <i>d<sub>bit</sub></i> in.	Minimum Concrete Compressive Strength ( <i>f'<sub>c</sub></i> )					
			2,000 psi (13.8 MPa)		4,000 psi (27.6 MPa)		6,000 psi (41.4 MPa)	
			Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	3/4 (19.1)	3/8	760 (3.4)	1,200 (5.4)	1,140 (5.1)	1,200 (5.4)	1,440 (6.5)	1,200 (5.4)
	7/8 (22.2)		880 (4.0)	1,440 (6.5)	1,145 (5.2)	1,440 (6.5)	2,045 (9.2)	1,440 (6.5)
5/16 (7.9)	1 (25.4)	5/8	1,120 (5.0)	1,980 (8.9)	1,680 (7.6)	1,980 (8.9)	2,200 (9.9)	1,980 (8.9)
	1 1/2 (38.1)		2,205 (9.9)	2,740 (12.3)	2,775 (12.5)	2,740 (12.3)	4,825 (21.7)	2,740 (12.3)
3/8 (9.5)	1 (25.4)	5/8	1,370 (6.2)	2,550 (11.5)	2,070 (9.3)	2,550 (11.5)	2,290 (10.3)	2,550 (11.5)
	1 1/2 (38.1)		2,445 (11.0)	3,145 (14.2)	2,800 (12.5)	3,145 (14.2)	5,085 (22.9)	3,145 (14.2)
1/2 (12.7)	1 1/2 (38.1)	3/4	2,140 (9.6)	4,020 (18.1)	4,025 (18.1)	4,020 (18.1)	7,285 (32.8)	4,020 (18.1)
	2 (50.8)		2,780 (12.5)	4,020 (18.1)	4,375 (19.7)	4,020 (18.1)	9,455 (42.5)	4,020 (18.1)
5/8 (15.9)	2 1/4 (57.2)	1	5,725 (25.8)	6,400 (28.8)	9,410 (42.3)	6,400 (28.8)	10,500 (46.6)	6,400 (28.8)

1. Tabulated load values are applicable to anchors with carbon and stainless steel cones.
2. Tabulated load values are for anchors installed in concrete. Concrete compressive strength must be at the specified minimum at the time of installation.
3. Ultimate load capacities must be reduced by a minimum safety factor of 4.0 or greater to determine allowable working load. Consideration of safety factors of 20 or higher may be necessary depending upon the application such as life safety, overhead and in sustained tensile loading applications.


#### Allowable Load Capacities for Hollow-Set Dropin in Normal-Weight Concrete<sup>1,2,3,4</sup>

Rod/ Anchor Diameter <i>d</i> in. (mm)	Min. Embed. Depth <i>h<sub>v</sub></i> in. (mm)	Drill Bit Diameter <i>d<sub>bit</sub></i> in.	Minimum Concrete Compressive Strength ( <i>f'<sub>c</sub></i> )					
			2,000 psi (13.8 MPa)		4,000 psi (27.6 MPa)		6,000 psi (41.4 MPa)	
			Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	3/4 (19.1)	3/8	190 (0.9)	300 (1.4)	285 (1.3)	300 (1.4)	360 (1.6)	300 (1.4)
	7/8 (22.2)		220 (1.0)	360 (1.6)	285 (1.3)	360 (1.6)	510 (2.3)	360 (1.6)
5/16 (7.9)	1 (25.4)	5/8	280 (1.3)	495 (2.2)	420 (1.9)	495 (2.2)	550 (2.5)	495 (2.2)
	1 1/2 (38.1)		550 (2.5)	685 (3.0)	695 (3.1)	685 (3.0)	1,205 (5.4)	685 (3.0)
3/8 (9.5)	1 (25.4)	5/8	345 (1.6)	640 (2.9)	520 (2.3)	640 (2.9)	575 (2.6)	640 (2.9)
	1 1/2 (38.1)		610 (2.7)	785 (3.5)	700 (3.0)	785 (3.5)	1,270 (5.7)	785 (3.5)
1/2 (12.7)	1 1/2 (38.1)	3/4	535 (2.4)	1,005 (4.5)	1,005 (4.5)	1,005 (4.5)	1,820 (8.2)	1,005 (4.5)
	2 (50.8)		695 (3.1)	1,005 (4.5)	1,095 (4.9)	1,005 (4.5)	2,365 (10.6)	1,005 (4.5)
5/8 (15.9)	2 1/4 (57.2)	1	1,430 (6.4)	1,600 (7.2)	2,355 (10.6)	1,600 (7.2)	2,625 (11.7)	1,600 (7.2)

1. Tabulated load values are applicable to anchors with carbon and stainless steel cones.
2. Allowable load capacities listed are calculated using an applied safety factor of 4.0. Consideration of safety factors of 20 or higher may be necessary depending upon the application such as life safety, overhead and in sustained tensile loading applications.
3. Linear interpolation may be used to determine allowable loads for intermediate embedments and compressive strengths.
4. Allowable load capacities are multiplied by reduction factors found in the Design Criteria section when anchor spacing or edge distances are less than critical distances.

**PERFORMANCE DATA**


**Ultimate and Allowable Load Capacities for Hollow-Set Dropin in Hollow Core Plank<sup>1,2</sup>**

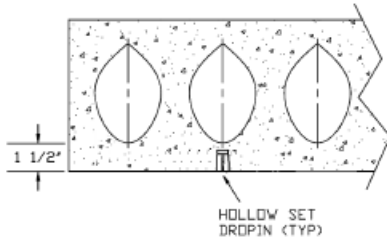

Rod/ Anchor Diameter <i>d</i> in. (mm)	Minimum Embedment Depth <i>h<sub>v</sub></i> in. (mm)	Drill Bit Diameter <i>d<sub>bit</sub></i> in.	Minimum Concrete Compressive Strength <i>f'<sub>c</sub></i> ≥ 5,000 psi (34.5 MPa)			
			Ultimate Load		Allowable Load <sup>2</sup>	
			Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	7/8 (22.2)	3/8	1,190 (5.4)	1,440 (6.5)	300 (1.4)	360 (1.6)
5/16 (7.9)	1 (25.4)	5/8	2,280 (10.3)	2,740 (12.3)	570 (2.6)	685 (3.1)
3/8 (9.5)	1 (25.4)	5/8	2,525 (11.4)	2,740 (12.3)	630 (2.8)	685 (3.1)
	1 1/2 (38.1)	5/8	3,620 (16.3)	3,145 (14.2)	905 (4.1)	785 (3.5)
1/2 (12.7)	1 1/4 (31.8)	3/4	5,420 (24.4)	5,580 (25.1)	1,355 (6.1)	1,395 (6.3)
5/8 (15.9)	1 1/2 (38.1)	1	6,560 (29.2)	8,320 (37.4)	1,640 (7.3)	2,080 (9.4)

1. Tabulated load values are applicable to anchors with carbon and stainless steel cones and set with sleeve flush to surface of the plank and with setting tool for solid base materials.
2. Allowable load capacities listed are calculated using and applied safety factor of 4.0. Consideration of safety factors of 20 or higher may be necessary depending upon the application such as life safety, overhead and in sustained tensile loading applications.

**Ultimate and Allowable Load Capacities for Hollow-Set Dropin in Hollow Concrete Masonry<sup>1,2,3</sup>**




Rod/ Anchor Diameter <i>d</i> in. (mm)	Minimum Embedment Depth <i>h<sub>v</sub></i> in. (mm)	Drill Bit Diameter <i>d<sub>bit</sub></i> in.	<i>f'<sub>m</sub></i> ≥ 1,500 psi (10.4 MPa)			
			Ultimate Load		Allowable Load <sup>2</sup>	
			Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	7/8* (22.2)	3/8	530 (2.4)	1,575 (7.1)	105 (0.5)	315 (1.4)
5/16 (7.9)	1* (25.4)	5/8	1,035 (4.7)	1,815 (8.2)	205 (0.9)	365 (1.6)
3/8 (9.5)	1* (25.4)	5/8	1,225 (5.5)	2,485 (11.2)	245 (1.1)	495 (2.2)
1/2 (12.7)	1 1/4* (31.8)	3/4	1,790 (8.1)	3,655 (16.4)	360 (1.6)	730 (3.3)
5/8 (15.9)	1 1/2* (38.1)	1	1,790 (8.1)	3,740 (16.8)	360 (1.6)	750 (3.4)

1. Tabulated load values are applicable to anchors with carbon and stainless steel cones.
  2. Tabulated load values are for anchors installed in minimum 6-inch wide, minimum Grade N, Type II, lightweight, medium-weight or normal-weight concrete masonry units conforming to ASTM C 90. Mortar must be minimum Type N. Masonry cells may be grouted. Masonry compressive strength must be at the specified minimum at the time of installation (*f'<sub>m</sub>* ≥ 1,500 psi).
  3. Allowable load capacities listed are calculated using and applied safety factor of 5.0. Consideration of safety factors of 20 or higher may be necessary depending upon the application such as life safety, and in sustained tensile loading applications.
- \* Anchors were installed with sleeve flush to face shell surface and with setting tool for hollow base materials.

**PERFORMANCE DATA**

**Ultimate and Allowable Load Capacities for Hollow-Set Dropin in Solid Clay Brick Masonry<sup>1,2,3,4</sup>**



Rod/ Anchor Diameter <i>d</i> in. (mm)	Minimum Embed. Depth <i>h<sub>v</sub></i> in. (mm)	Minimum Edge Distance in. (mm)	Minimum End Distance in. (mm)	Structural Brick Masonry <i>f'<sub>m</sub></i> ≥ 1,500 psi (10.4 MPa)			
				Ultimate Load		Allowable Load	
				Tension lbs. (kN)	Shear lbs. (kN)	Tension lbs. (kN)	Shear lbs. (kN)
1/4 (6.4)	7/8 (22.2)	6 (152.4)	8 (203.2)	880 (4.0)	1,640 (7.4)	175 (0.8)	330 (1.5)
5/16 (9.5)	1 1/4 (31.8)	8 (203.2)		1,460 (6.6)	2,230 (10.0)	290 (1.3)	445 (2.0)
3/8 (12.7)	1 1/4 (31.8)	8 (203.2)		1,860 (8.4)	2,980 (13.4)	370 (1.7)	595 (2.7)
1/2 (15.9)	1 1/2 (38.1)	10 (254.0)		3,240 (14.6)	4,230 (19.0)	650 (2.9)	845 (3.8)
5/8 (19.1)	2 1/4 (57.2)	12 (304.8)		4,680 (21.1)	6,420 (28.9)	935 (4.2)	1,605 (7.2)

1. Tabulated load values are for anchors with carbon or stainless steel cones.
2. Tabulated load values are for anchors installed in multiple wythe, minimum Grade SW, solid clay brick masonry walls conforming to ASTM C 62. Mortar must be minimum Type N. Masonry compressive strength must be at the specified minimum at the time of installation (*f'<sub>m</sub>* ≥ 1,500 psi).
3. Allowable load capacities listed are calculated using and applied safety factor of 5.0. Consideration of safety factors of 20 or higher may be necessary depending upon the application such as life safety, and in sustained tensile loading applications.
4. The tabulated values are for anchors installed at a minimum of 16 anchor diameters on center for 100 percent capacity. Spacing distances may be reduced to 8 anchor diameters on center provided the capacities are reduced by 50 percent. Linear interpolation may be used for intermediate spacing.

**DESIGN CRITERIA (ALLOWABLE STRESS DESIGN)**

**Combined Loading**

For anchors loaded in both shear and tension, the combination of loads should be proportioned as follows:

$$\left(\frac{N_u}{N_n}\right) + \left(\frac{V_u}{V_n}\right) \leq 1$$

Where: *N<sub>u</sub>* = Applied Service Tension Load  
*N<sub>n</sub>* = Allowable Tension Load  
*V<sub>u</sub>* = Applied Service Shear Load  
*V<sub>n</sub>* = Allowable Shear Load

**Load Adjustment Factors for Spacing and Edge Distances<sup>1</sup>**

Anchor Installed in Normal-Weight Concrete					
Anchor Dimension	Load Type	Critical Distance (Full Anchor Capacity)	Critical Load Factor	Minimum Distance (Reduced Capacity)	Minimum Load Factor
Spacing ( <i>s</i> )	Tension and Shear	<i>s<sub>cr</sub></i> = 3.0 <i>h<sub>v</sub></i>	<i>F<sub>N<sub>S</sub></sub></i> = <i>F<sub>V<sub>S</sub></sub></i> = 1.0	<i>s<sub>min</sub></i> = 1.5 <i>h<sub>v</sub></i>	<i>F<sub>N<sub>S</sub></sub></i> = <i>F<sub>V<sub>S</sub></sub></i> = 0.50
Edge Distance ( <i>c</i> )	Tension	<i>c<sub>cr</sub></i> = 14 <i>d</i>	<i>F<sub>N<sub>C</sub></sub></i> = 1.0	<i>c<sub>min</sub></i> = 8 <i>d</i>	<i>F<sub>N<sub>C</sub></sub></i> = 0.80
	Shear	<i>c<sub>cr</sub></i> = 14 <i>d</i>	<i>F<sub>V<sub>C</sub></sub></i> = 1.0	<i>c<sub>min</sub></i> = 8 <i>d</i>	<i>F<sub>V<sub>C</sub></sub></i> = 0.50


1. Allowable load values found in the performance data tables are multiplied by reduction factors when anchor spacing or edge distances are less than critical distances. Linear interpolation is allowed for intermediate anchor spacing and edge distances between critical and minimum distances. When an anchor is affected by both reduced spacing and edge distance, the spacing and edge reduction factors must be combined (multiplied). Multiple reduction factors for anchor spacing and edge distance may be required depending on the anchor group configuration.

**DESIGN CRITERIA (ALLOWABLE STRESS DESIGN)**

**Load Adjustment Factors for Normal-Weight Concrete**


Spacing, Tension ( $F_{NS}$ ) & Shear ( $F_{VS}$ )						
Dia. (in.)	1/4	5/16	3/8	1/2	5/8	
$h_v$ (in.)	7/8	1 1/2	1 1/2	2	2 1/4	
$s_{cr}$ (in.)	2 5/8	4 1/2	4 1/2	6	6 3/4	
$s_{min}$ (in.)	1 3/8	2 1/4	2 1/4	3	3 3/8	
Spacing, $s$ (inches)	1 3/8	0.50				
	2 1/4	0.86	0.50	0.50		
	2 5/8	1.00	0.58	0.58		
	3		0.67	0.67	0.50	
	3 3/8		0.75	0.75	0.56	0.50
	4		0.89	0.89	0.67	0.59
	4 1/2		1.00	1.00	0.75	0.67
	5				0.83	0.74
	6				1.00	0.89
	6 3/4					1.00

Notes: For anchors loaded in tension and shear, the critical spacing ( $s_{cr}$ ) is equal to 3 embedment depths ( $3h_v$ ) at which the anchor achieves 100% of load. Minimum spacing ( $s_{min}$ ) is equal to 1.5 embedment depths ( $1.5h_v$ ) at which the anchor achieves 50% of load.




Edge Distance, Tension ( $F_{NC}$ )						
Dia. (in.)	1/4	5/16	3/8	1/2	5/8	
$c_{cr}$ (in.)	3 1/2	4 3/8	5 1/4	7	8 3/4	
$c_{min}$ (in.)	2	2 1/2	3	4	5	
Edge Distance, $c$ (inches)	2	0.80				
	2 1/2	0.87	0.80			
	3	0.93	0.85	0.80		
	3 1/2	1.00	0.91	0.84		
	4		0.96	0.89	0.80	
	4 3/8		1.00	0.92	0.83	
	5			0.98	0.87	0.80
	5 1/4			1.00	0.88	0.81
	6				0.93	0.85
	7				1.00	0.91
	8					0.96
	8 3/4					1.00

Notes: For anchors loaded in tension, the critical edge distance ( $c_{cr}$ ) is equal to 14 anchor diameters ( $14d$ ) at which the anchor achieves 100% of load. Minimum edge distance ( $c_{min}$ ) is equal to 8 anchor diameters ( $8d$ ) at which the anchor achieves 80% of load.



Edge Distance, Shear ( $F_{VC}$ )						
Dia. (in.)	1/4	5/16	3/8	1/2	5/8	
$c_{cr}$ (in.)	3 1/2	4 3/8	5 1/4	7	8 3/4	
$c_{min}$ (in.)	2	2 1/2	3	4	5	
Edge Distance, $c$ (inches)	2	0.50				
	2 1/2	0.67	0.50			
	3	0.83	0.63	0.50		
	3 1/2	1.00	0.77	0.61		
	4		0.90	0.72	0.50	
	4 3/8		1.00	0.81	0.56	
	5			0.94	0.67	0.50
	5 1/4			1.00	0.71	0.53
	6				0.83	0.63
	7				1.00	0.77
	8					0.90
	8 3/4					1.00

Notes: For anchors loaded in shear, the critical edge distance ( $c_{cr}$ ) is equal to 14 anchor diameters ( $14d$ ) at which the anchor achieves 100% of load. Minimum edge distance ( $c_{min}$ ) is equal to 8 anchor diameters ( $8d$ ) at which the anchor achieves 50% of load.



**ORDERING INFORMATION**

**Hollow-Set Dropin with Carbon Steel Cone**

Catalog Number	Rod/Anchor Diameter	Drill Diameter	Overall Length	Sleeve Length	Std. Box	Std. Ctn.	Wt./ 100
9320	1/4"	3/8"	7/8"	5/8"	100	1,000	1-3/4
9330	5/16"	5/8"	1-5/16"	15/16"	50	500	5-1/2
9340	3/8"	5/8"	1-5/16"	15/16"	50	300	5-1/2
9350	1/2"	3/4"	1-3/4"	1 1/4"	50	250	9-1/2
9360	5/8"	1"	2"	1 1/2"	25	125	21



**Hollow-Set Dropin with Stainless Steel Cone**

Catalog Number	Rod/Anchor Diameter	Drill Diameter	Overall Length	Sleeve Length	Std. Box	Std. Ctn.	Wt./ 100
9420	1/4"	3/8"	7/8"	5/8"	100	1,000	1-3/4
9440	3/8"	5/8"	1-5/16"	15/16"	100	500	5-1/2

**Setting Tool for Solid Base Materials**

Catalog Number	Size	Standard Box	Standard Carton
9322	1/4"	1	1
9342	5/16" and 3/8"	1	1
9352	1/2"	1	1
9362	5/8"	1	1



**Setting Tool for Hollow Base Materials\***

Catalog Number	Size	Standard Box	Standard Carton
9323	1/4"	1	1
9333	5/16"	1	1
9343	3/8"	1	1
9353	1/2"	1	1
9363	5/8"	1	1



\* Hollow set tool for hollow block and clay brick masonry base materials.